

Pipe

					NEW	API PREMIUM
Pipe size	in	4.500	OD	in	4.500	4.365
Pipe weight	lb/ft	16.60	Thickness	in	0.337	0.270
Upset Type		IEU	X-Sec Area	in ²	4.407	3.469
Tube grade		S135	Section Modulus	in ³	4.271	3.3468
Range		2	Polar Section Modulus	in ³	8.543	6.6937
Tube Yield	ksi	135	Tensile Yield	lbs	595,000	468,000
ID	in	3.826	Torsional Yield	ft-lbs	55,500	43,500
			80% Torsional Yield	ft-lbs	44,400	34,800
			Internal Pressure Yield	psi	17,700	16,200
			Collapse Yield	psi	16,800	11,000
			D/t		13.35	16.19
			Connection/Tube Torsional Ratio		0.638	

Tool Joint

					NEW	REC MIN OD
Connection Type		DS40	OD	in	5.250	4.875
Material Yield Strength	ksi	130	Tensile Yield Strength	lbs	840,800	840,800
OD	in	5.250	Torsional Yield Strength	ft-lbs	35,400	26,200
ID	in	2.688	Recommended Makeup Torque	ft-lbs	21,200	15,700
Pin Shoulder Angle	deg	18				
Pin Tool Joint Length	in	14.0				
Box Tool Joint Length	in	14.0				

Drill Pipe Assembly

Shoulder-Shoulder Length	ft	31.5		
Adjusted Weight	lbs/ft	18.81		
Closed End Displacement	gal/ft	0.851	bbl/ft	0.0203
Open End Displacement	gal/ft	0.287	bbl/ft	0.0068
Fluid Capacity	gal/ft	0.563	bbl/ft	0.0134
Drift Size	in	2.563		


The information contained in this data sheet and other attached documentation is for reference use only. It is not intended to imply any explicit recommendation regarding processes, procedures, or performance of the end product. It is the responsibility of the end user to verify and determine the appropriate use of the technical information - no expressed or implied warranty by Complete Group is intended.

Calculations are based on uniform wall thickness and outside diameter – no safety factor has been applied. The information provided for inspection classes is based on uniform wear and is not intended to recommend or confirm operational limits of any used product. It is recommended that drilling torque not exceed 80% of the makeup torque, however it is the responsibility of the end user to determine the acceptable use of the end product including appropriate performance ratings and safety factors where applicable. All connection torque calculations have been performed using a thread compound friction factor of 1.0. Complete Group does not endorse any specific thread compound and waives all responsibility in determining appropriate makeup torque values for any specific drilling circumstance. Modifying makeup torque values for any reason shall be done at the end users discretion and risk.


The information in this publication is subject to change without notice, please contact Complete Group for the latest publication

Pipe Size: 4.500 in Grade: S135 Range: 2
 Pipe Weight: 16.60 lb/ft Upset: IEU Connection: DS40

Makeup Torque Then Tension Chart

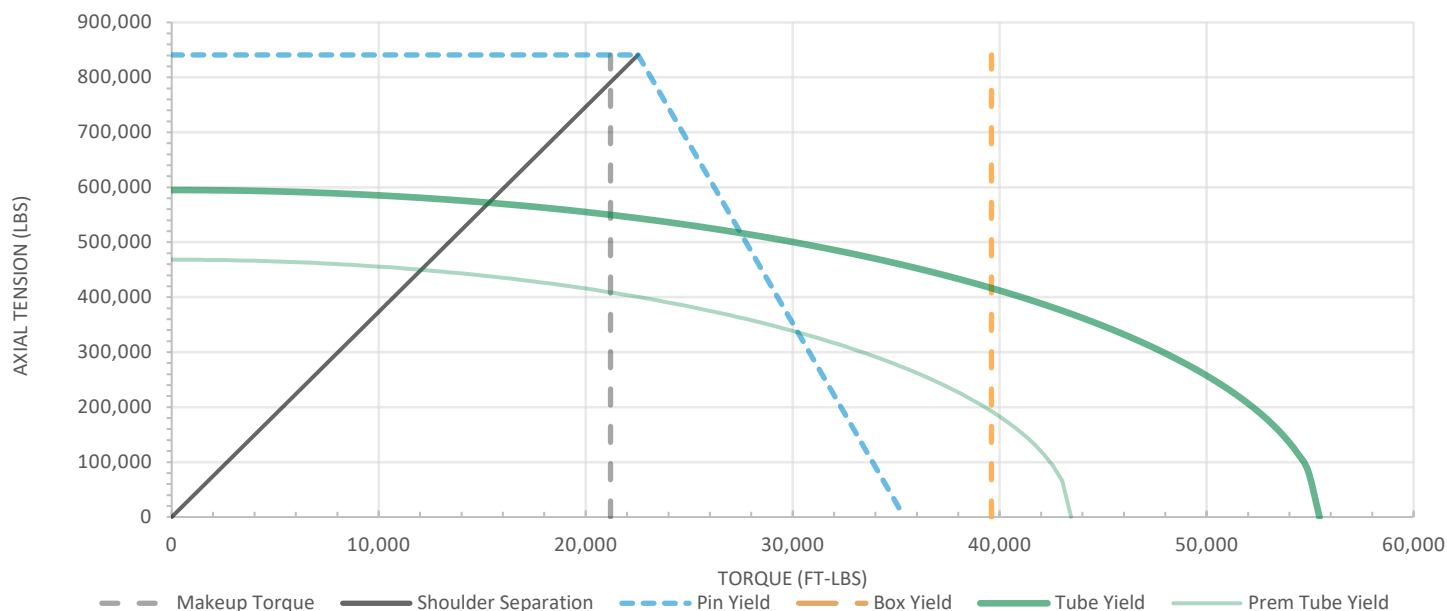

Connection Wear Chart

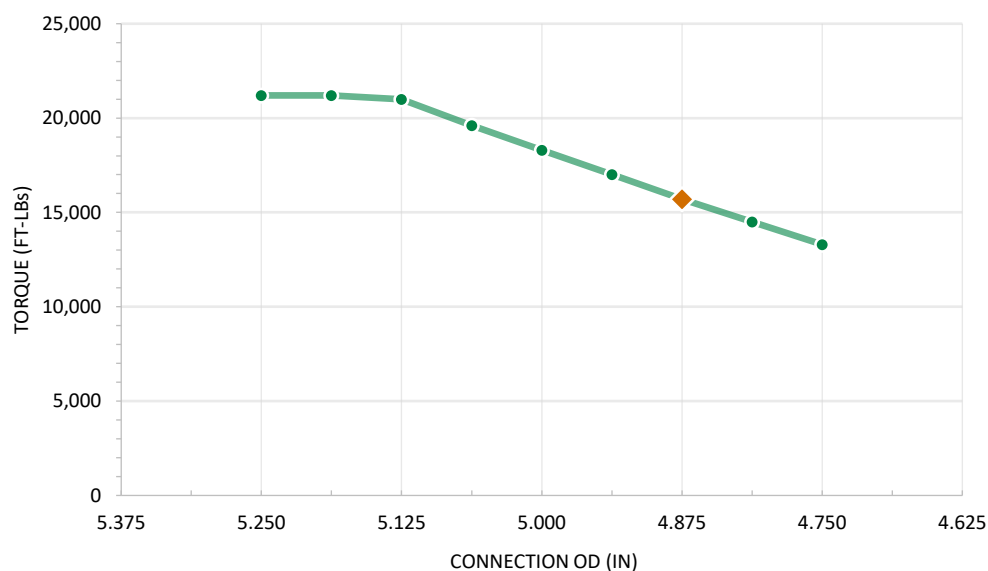

CONNECTION OD (in)	MAKEUP TORQUE (ft-lbs)
5.250	21,200
5.188	21,200
5.125	21,000
5.063	19,600
5.000	18,300
4.938	17,000
4.875	15,700
4.813	14,500
4.750	13,300
MIN REC OD (in)	
4.875	15,700

The information contained in this data sheet and other attached documentation is for reference use only. It is not intended to imply any explicit recommendation regarding processes, procedures, or performance of the end product. It is the responsibility of the end user to verify and determine the appropriate use of the technical information - no expressed or implied warranty by Complete Group is intended.

Calculations are based on uniform wall thickness and outside diameter – no safety factor has been applied. The information provided for inspection classes is based on uniform wear and is not intended to recommend or confirm operational limits of any used product. It is recommended that drilling torque not exceed 80% of the makeup torque, however it is the responsibility of the end user to determine the acceptable use of the end product including appropriate performance ratings and safety factors where applicable. All connection torque calculations have been performed using a thread compound friction factor of 1.0. Complete Group does not endorse any specific thread compound and waives all responsibility in determining appropriate makeup torque values for any specific drilling circumstance. Modifying makeup torque values for any reason shall be done at the end users discretion and risk.

The information in this publication is subject to change without notice, please contact Complete Group for the latest publication